Glass Fiber-Optic Cable
Reflex Mode

SLK2338

Optical Data	
Fiber Bundle Diameter	3 mm
Opening Angle	68 °
Fiber	Step Index
Fiber Diameter	50 µm
Fiber Distribution	separate fiber bundles
Mechanical Data	
Temperature Range	-25...300 °C
Bending Radius	80 mm
Fiber-Optic Length	2,5 m
Jacket Material	Stainless Steel
Fiber Optic Material	Glass
Material End Sleeve	Stainless Steel
End Sleeve No.	51
Light Emission	straight
Fiber-Optic Cable Adapter No.	01

- **A broad range of applications are possible due to the modular system design**
- **Stock types deliverable at short notice**

Glass fiber optic cables are very flexible and can be used in applications with less space. Especially in applications with hot environment the metal casing fiber optic cables are the answer.

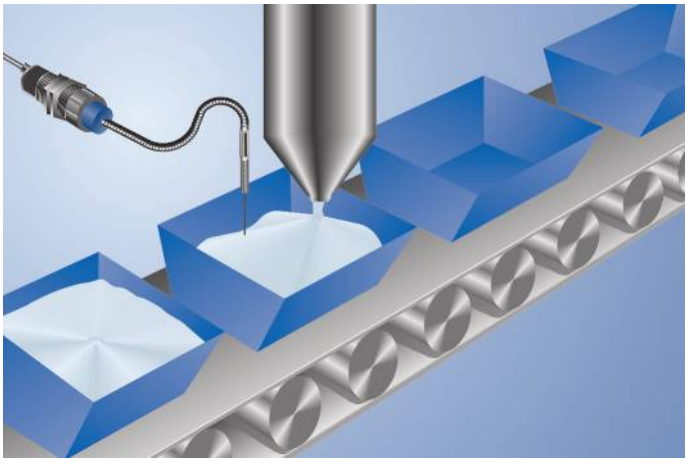

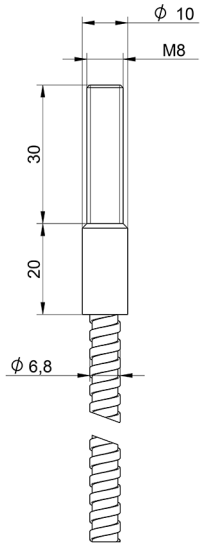
ϕ 10
M8
30
20
ϕ 6,8