

CONTACTOR RELAY 44E EN 50 011 4NO+4NC, SCREW  
TERMINALS DC OPERATION DC SOLENOID SYSTEM DC 24V



Figure similar

| General technical data:                                                             |                |
|-------------------------------------------------------------------------------------|----------------|
| Size of contactor                                                                   | 0              |
| Ambient temperature during operation                                                | -25 ... +55 °C |
| Protection class IP on the front                                                    | IP20           |
| Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750 | K              |
| Equipment marking acc. to DIN EN 61346-2                                            | K              |
| Equipment marking acc. to DIN EN 81346-2                                            | K              |
| Control circuit/ Control:                                                           |                |
| Type of voltage of the control supply voltage                                       | DC             |
| Control supply voltage                                                              | 24 V           |
| • at DC                                                                             |                |
| — Rated value                                                                       |                |
| Auxiliary circuit:                                                                  |                |
| Operating current at AC-15                                                          | 10 A           |
| • at 230 V Rated value                                                              |                |
| • at 400 V Rated value                                                              |                |
|                                                                                     | 6 A            |



|                                                                    |                           |
|--------------------------------------------------------------------|---------------------------|
| Protection against electrical shock                                | finger-safe               |
| B10 value with high demand rate acc. to SN 31920                   | 1 000 000                 |
| • Note                                                             | With 0.3 x I <sub>e</sub> |
| T1 value for proof test interval or service life acc. to IEC 61508 | 20 y                      |

#### Further information

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

##### Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TH42440BB4>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3TH42440BB4>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3TH42440BB4&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TH42440BB4&lang=en)

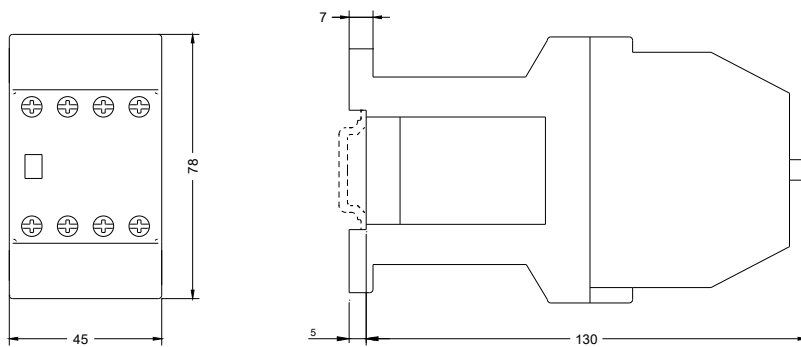

last modified:

17.07.2015