

22MM METAL ROUND COMPLETE UNIT COMBINATION:
EMERGEN.-STOP MUSHR.PUSHB. 40MM LATCH.W. ROT.
-TO-UNLATCH MECH. WITH YELLOW BACKING PLATE
SCREW TERMINAL,
1NO+1NC WITH HOLDER RED INSCRIPTION:
EMERGENCY STOP

Enclosure:

Material / of the enclosure		metal
Form / of the enclosure front		round

Actuato/ signaling device:

Design of the product		Complete unit round with positive latching in accordance with ISO 13850
Design of the operating mechanism		Emergency stop mushroom pushbutton
Functionality / of the actuator		Latching
Type of unlocking device		rotate-to-unlatch mechanism
Color / of the activation element		Red
Material / of the activation element		plastic
Number of switching positions		2
Product component / front ring		No

Holder:

Material / of the holder		Metal
--------------------------	--	-------

Contact block/ lampholder:

Design of the electrical connection		screw-type terminals
Number of switching elements		1
Number of NC contacts / for auxiliary contacts		1

Number of NO contacts / for auxiliary contacts		1
Number of changeover contacts / for auxiliary contacts		0
Product function / positive opening		Yes
Number of lampholders		0
Product component / fluorescent materials		No
Product extension / optional / fluorescent materials		No

Accessories:

Product component / holder for 3 switching elements

No

General technical details:

Voltage type / of operating voltage

AC/DC

Operating voltage

• rated value

V

5 ... 400

Operating current

• at AC-12

• at 24 V / rated value

A

10

• at 48 V / rated value

A

10

• at 110 V / rated value

A

10

• at 230 V / rated value

A

10

• at 400 V / rated value

A

10

• at AC-15

• at 24 V / rated value

A

6

• at 48 V / rated value

A

6

• at 110 V / rated value

A

6

• at 230 V / rated value

A

6

• at 400 V / rated value

A

3

• at DC-12

• at 24 V / rated value

A

10

• at 48 V / rated value

A

5

• at 110 V / rated value

A

2.5

• at 230 V / rated value

A

1

• at DC-13

• at 24 V / rated value

A

3

• at 48 V / rated value

A

1.5

• at 110 V / rated value

A

0.7

• at 230 V / rated value

A

0.3

• for devices without incandescent lamp / according to IEC 60068-2-27

<= 50g

Resistance against vibration / according to IEC 60068-2-6

20 ... 200 Hz: 5g

Operating cycles / maximum

1/h

1,000

Mechanical operating cycles as operating time / typical		300,000
Reference code		
• according to DIN EN 61346-2		S
• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		S
Tightening torque / of the screws in the bracket / maximum	N·m	1
• during operating	°C	-25 ... +70
• during storage	°C	-40 ... +80
Protection class IP		IP67
B10 value / with high demand rate / according to SN 31920		100,000
Proportion of dangerous failures / with high demand rate / according to SN 31920	%	20
Proportion of dangerous failures / with low demand rate / according to SN 31920	%	20
Failure rate [FIT] / with low demand rate / according to SN 31920	FIT	100
T1 value / for proof test interval or service life / according to IEC 61508	a	20
climatic class / during the operating phase / according to EN 60721		3K6
Mounting type		front mounting
Shape / of the installation hole		round
Installation width	mm	40.5
Mounting diameter	mm	22
Mounting height	mm	49
Mounting depth	mm	63

Certificates/ approvals:

General Product Approval



CCC



CSA



EG-Konf.

Test Certificates

[Special Test Certificate](#)

Shipping Approval



ABS



DNV



LRS



PRS



RINA

other

[Confirmation](#)

[other](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator


<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3SB3601-1HR20/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SB3601-1HR20

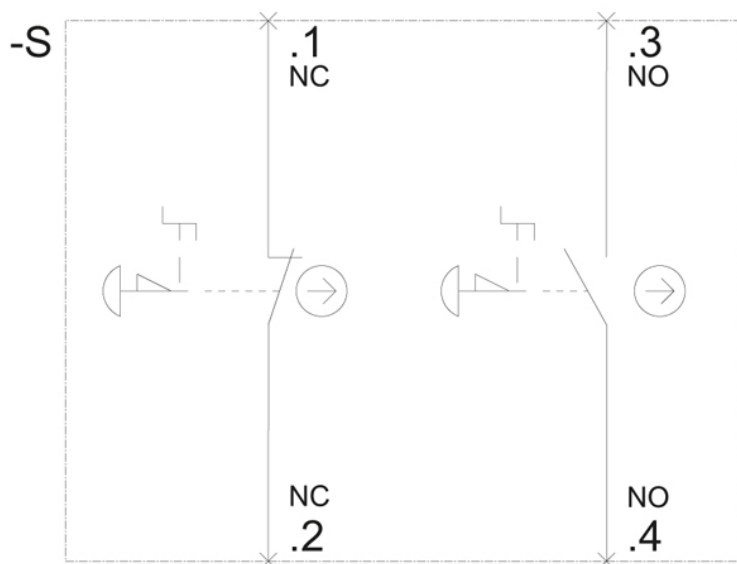

last change:

Jun 9, 2014